



**WATER VALVES**

# **TIANSHENG VALVE**

**HIGH QUALITY INDUSTRIAL VALVES**



**ZHEJIANG TIANSHENG VALVE CO.,LTD**

## ► 水系统阀门系列 Water System Valve Series



**100X遥控浮球阀**  
Remote float ball valve

公称通径: DN50~800mm

公称压力: PN1.0~2.5MPa

适用介质: 水、污水、海水等

适用温度:  $\leq 80^{\circ}\text{C}$

Nominal Diameter: DN50~800mm

Nominal Pressure: PN1.0~2.5MPa

Mediums: Water, sewage, sea water etc

Temperature Range:  $\leq 80^{\circ}\text{C}$



**200X可调式减压阀**  
Adjustable pressure reducing valve

公称通径: DN50~800mm

公称压力: PN1.0~2.5MPa

适用介质: 水、污水、海水等

适用温度:  $\leq 80^{\circ}\text{C}$

Nominal Diameter: DN50~800mm

Nominal Pressure: PN1.0~2.5MPa

Mediums: Water, sewage, sea water etc

Temperature Range:  $\leq 80^{\circ}\text{C}$



**300X缓闭止回阀**  
Slow closing check valve

公称通径: DN50~800mm

公称压力: PN1.0~2.5MPa

适用介质: 水、污水、海水等

适用温度:  $\leq 80^{\circ}\text{C}$

Nominal Diameter: DN50~800mm

Nominal Pressure: PN1.0~2.5MPa

Mediums: Water, sewage, sea water etc

Temperature Range:  $\leq 80^{\circ}\text{C}$



**500X泄压/持压阀**  
Pressure relief/holding pressure valve

公称通径: DN50~800mm

公称压力: PN1.0~2.5MPa

适用介质: 水、污水、海水等

适用温度:  $\leq 80^{\circ}\text{C}$

Nominal Diameter: DN50~800mm

Nominal Pressure: PN1.0~2.5MPa

Mediums: Water, sewage, sea water etc

Temperature Range:  $\leq 80^{\circ}\text{C}$



**800X压差旁通平衡阀**  
Differential pressure bypass valve

公称通径: DN50~800mm

公称压力: PN1.0~2.5MPa

适用介质: 水、污水、海水等

适用温度:  $\leq 80^{\circ}\text{C}$

Nominal Diameter: DN50~800mm

Nominal Pressure: PN1.0~2.5MPa

Mediums: Water, sewage, sea water etc

Temperature Range:  $\leq 80^{\circ}\text{C}$



**106X电磁遥控浮球阀**  
Electromagnetic remote control ball valve

公称通径: DN50~600mm

公称压力: PN1.0~2.5MPa

适用介质: 水、污水、海水等

适用温度:  $\leq 80^{\circ}\text{C}$

Nominal Diameter: DN50~600mm

Nominal Pressure: PN1.0~2.5MPa

Mediums: Water, sewage, sea water etc

Temperature Range:  $\leq 80^{\circ}\text{C}$

## ► 水系统阀门系列 Water System Valve Series



**F745X遥控浮球阀**  
Remote control float valve

公称通径: DN50~1800mm

公称压力: PN1.0~2.5MPa

适用介质: 水、污水、海水等

适用温度:  $\leq 80^{\circ}\text{C}$

Nominal Diameter: DN50~1800mm

Nominal Pressure: PN1.0~2.5MPa

Mediums: Water, sewage, sea water etc

Temperature Range:  $\leq 80^{\circ}\text{C}$



**JD745X 隔膜式多功能水泵控制阀**  
Diaphragm type multifunctional water pump control valve

公称通径: DN50~800mm

公称压力: PN1.0~2.5MPa

适用介质: 水、污水、海水等

适用温度:  $\leq 80^{\circ}\text{C}$

Nominal Diameter: DN50~800mm

Nominal Pressure: PN1.0~2.5MPa

Mediums: Water, sewage, sea water etc

Temperature Range:  $\leq 80^{\circ}\text{C}$



**YX741可调式减压稳压阀**  
Adjustable vacuum regulator valve

公称通径: DN50~1800mm

公称压力: PN1.0~2.5MPa

适用介质: 水、污水、海水等

适用温度:  $\leq 80^{\circ}\text{C}$

Nominal Diameter: DN50~1800mm

Nominal Pressure: PN1.0~2.5MPa

Mediums: Water, sewage, sea water etc

Temperature Range:  $\leq 80^{\circ}\text{C}$



**AX742X安全泄压/持压阀**  
Safety relief/holding pressure valve

公称通径: DN50~1800mm

公称压力: PN1.0~2.5MPa

适用介质: 水、污水、海水等

适用温度:  $\leq 80^{\circ}\text{C}$

Nominal Diameter: DN50~1800mm

Nominal Pressure: PN1.0~2.5MPa

Mediums: Water, sewage, sea water etc

Temperature Range:  $\leq 80^{\circ}\text{C}$



**DS101/201X活塞式多功能水泵控制阀**  
Piston type multifunctional water pump control valve

公称通径: DN50~1400mm

公称压力: PN1.0~2.5MPa

适用介质: 水、污水、海水等

适用温度:  $\leq 80^{\circ}\text{C}$

Nominal Diameter: DN50~1400mm

Nominal Pressure: PN1.0~2.5MPa

Mediums: Water, sewage, sea water etc

Temperature Range:  $\leq 80^{\circ}\text{C}$



**107X活塞式安全泄压阀**  
Piston type safety relief valve

公称通径: DN50~1400mm

公称压力: PN1.0~2.5MPa

适用介质: 水、污水、海水等

适用温度:  $\leq 80^{\circ}\text{C}$

Nominal Diameter: DN50~1400mm

Nominal Pressure: PN1.0~2.5MPa

Mediums: Water, sewage, sea water etc

Temperature Range:  $\leq 80^{\circ}\text{C}$

## ► 水系统阀门系列 Water System Valve Series



**J145X/H108X 隔膜式电动遥控阀**  
Diaphragm type electric remote control valve

公称通径: DN50~800mm

公称压力: PN1.0~2.5MPa

适用介质: 水、污水、海水等

适用温度:  $\leq 80^{\circ}\text{C}$

Nominal Diameter: DN50~800mm

Nominal Pressure: PN1.0~2.5MPa

Mediums: Water, sewage, sea water etc

Temperature Range:  $\leq 80^{\circ}\text{C}$



**BFG7M41HX 管力阀**  
Pipe force valve

公称通径: DN150~1600mm

公称压力: PN1.0~2.5MPa

适用介质: 水、污水、海水等

适用温度:  $\leq 80^{\circ}\text{C}$

Nominal Diameter: DN150~1600mm

Nominal Pressure: PN1.0~2.5MPa

Mediums: Water, sewage, sea water etc

Temperature Range:  $\leq 80^{\circ}\text{C}$



**BFDZ701Y/X 液力自控阀**  
Hydraulic automatic control valve

公称通径: DN50~2000mm

公称压力: PN1.0Mpa~4.0Mpa

适用介质: 水、污水、海水等

适用温度:  $\leq 80^{\circ}\text{C}$

Nominal Diameter: DN50~2000mm

Nominal Pressure: PN1.0Mpa~4.0Mpa

Mediums: Water, sewage, sea water etc

Temperature Range:  $\leq 80^{\circ}\text{C}$



**JLH41X 三合一止回阀型多功能控制阀**  
Three in one check valve type multifunctional control valve

公称通径: DN50~350mm

公称压力: PN1.0~2.5MPa

适用介质: 水、污水、海水等

适用温度:  $\leq 80^{\circ}\text{C}$

Nominal Diameter: DN50~350mm

Nominal Pressure: PN1.0~2.5MPa

Mediums: Water, sewage, sea water etc

Temperature Range:  $\leq 80^{\circ}\text{C}$



**Z45X 暗杆弹性座封闸阀**  
Dark bar elastic valve seat seal

公称通径: DN50~1000mm

公称压力: PN1.0~1.6MPa

适用介质: 水、污水、海水等

适用温度:  $\leq 80^{\circ}\text{C}$

Nominal Diameter: DN50~1000mm

Nominal Pressure: PN1.0~1.6MPa

Mediums: Water, sewage, sea water etc

Temperature Range:  $\leq 80^{\circ}\text{C}$



**Z41X 明杆弹性座封闸阀**  
Block letters that elastic bars gate valve

公称通径: DN50~800mm

公称压力: N1.0~1.6MPa

适用介质: 水、污水、海水等

适用温度:  $\leq 80^{\circ}\text{C}$

Nominal Diameter: DN50~800mm

Nominal Pressure: N1.0~1.6MPa

Mediums: Water, sewage, sea water etc

Temperature Range:  $\leq 80^{\circ}\text{C}$



**Z45X不锈钢软密封闸阀**  
Stainless steel soft seal gate valve

公称通径: DN50~300mm  
公称压力: PN1.0~2.5MPa  
适用介质: 水、污水、海水等  
适用温度:  $\leq 80^{\circ}\text{C}$

Nominal Diameter: DN50~300mm  
Nominal Pressure: PN1.0~2.5MPa  
Mediums: Water, sewage, sea water etc  
Temperature Range:  $\leq 80^{\circ}\text{C}$



**Z41X不锈钢软密封闸阀**  
Stainless steel soft seal gate valve

公称通径: DN50~300mm  
公称压力: PN1.0~2.5MPa  
适用介质: 水、污水、海水等  
适用温度:  $\leq 80^{\circ}\text{C}$

Nominal Diameter: DN50~300mm  
Nominal Pressure: PN1.0~2.5MPa  
Mediums: Water, sewage, sea water etc  
Temperature Range:  $\leq 80^{\circ}\text{C}$



**Z945X大口径软密封电动闸阀**  
Large diameter soft sealing electric gate valve

公称通径: DN500~1200mm  
公称压力: PN1.0~1.6MPa  
适用介质: 水、污水、海水等  
适用温度:  $\leq 80^{\circ}\text{C}$

Nominal Diameter: DN500~1200mm  
Nominal Pressure: PN1.0~1.6MPa  
Mediums: Water, sewage, sea water etc  
Temperature Range:  $\leq 80^{\circ}\text{C}$



**ZM215X 直埋式弹性座封闸阀**  
Directly buried elastic seat seal gate valve

公称通径: DN50~600mm  
公称压力: PN1.0~1.6MPa  
适用介质: 水、污水、海水等  
适用温度:  $\leq 80^{\circ}\text{C}$

Nominal Diameter: DN50~600mm  
Nominal Pressure: PN1.0~1.6MPa  
Mediums: Water, sewage, sea water etc  
Temperature Range:  $\leq 80^{\circ}\text{C}$



**Z41T铜芯防护闸阀(人防专用)**  
Copper core protective gate valve (for civil air defense)

公称通径: DN50~600mm  
公称压力: PN1.0~1.6MPa  
适用介质: 水、污水、海水等  
适用温度:  $\leq 80^{\circ}\text{C}$

Nominal Diameter: DN50~600mm  
Nominal Pressure: PN1.0~1.6MPa  
Mediums: Water, sewage, sea water etc  
Temperature Range:  $\leq 80^{\circ}\text{C}$



**Z73X/H刀型闸阀**  
Knife gate valve

公称通径: DN50~1000mm  
公称压力: PN1.0~1.6MPa  
适用介质: 纸浆、污水、煤浆等  
适用温度:  $\leq 80^{\circ}\text{C}$

Nominal Diameter: DN50~1000mm  
Nominal Pressure: PN1.0~1.6MPa  
Mediums: Pulp, sewage, coal slurry etc  
Temperature Range:  $\leq 80^{\circ}\text{C}$

## ► 水系统阀门系列 Water System Valve Series



**JXZ45X 软密封防盗闸阀**  
Soft seal anti-theft gate valve

公称通径: DN50~600mm

公称压力: PN1.0~1.6MPa

适用介质: 水、污水、海水等

适用温度:  $\leq 80^{\circ}\text{C}$

Nominal Diameter: DN50~600mm

Nominal Pressure: PN1.0~1.6MPa

Mediums: Water, sewage, sea water etc

Temperature Range:  $\leq 80^{\circ}\text{C}$



**Z15X 软密封丝扣闸阀**  
Soft seal screw gate valve

公称通径: DN15~100mm

公称压力: PN1.0~1.6MPa

适用介质: 水

适用温度:  $\leq 80^{\circ}\text{C}$

Nominal Diameter: DN15~100mm

Nominal Pressure: PN1.0~1.6MPa

Mediums: Water

Temperature Range:  $\leq 80^{\circ}\text{C}$



**CXZ15X 软密封加密封闸阀**  
Soft seal infill gate valve

公称通径: DN15~65mm

公称压力: PN1.0~1.6MPa

适用介质: 水

适用温度:  $\leq 80^{\circ}\text{C}$

Nominal Diameter: DN15~65mm

Nominal Pressure: PN1.0~1.6MPa

Mediums: Water

Temperature Range:  $\leq 80^{\circ}\text{C}$



**防滴漏表前阀**  
Front valve of anti leakage meter

公称通径: DN15~50mm

公称压力: PN1.0~1.6MPa

适用介质: 水

适用温度:  $\leq 80^{\circ}\text{C}$

Nominal Diameter: DN15~50mm

Nominal Pressure: PN1.0~1.6MPa

Mediums: Water

Temperature Range:  $\leq 80^{\circ}\text{C}$



**D71X 手动对夹式蝶阀**  
Manual for clip type butterfly valve

公称通径: DN50~200mm

公称压力: PN1.0~1.6MPa

适用介质: 水、污水、海水等

适用温度:  $\leq 80^{\circ}\text{C}$

Nominal Diameter: DN50~200mm

Nominal Pressure: PN1.0~1.6MPa

Mediums: Water, sewage, sea water etc

Temperature Range:  $\leq 80^{\circ}\text{C}$



**D371X 软密封对夹蝶阀**  
Soft seal butterfly valve

公称通径: DN50~1200mm

公称压力: N1.0~1.6MPa

适用介质: 水、污水、海水等

适用温度:  $\leq 80^{\circ}\text{C}$

Nominal Diameter: DN50~1200mm

Nominal Pressure: N1.0~1.6MPa

Mediums: Water, sewage, sea water etc

Temperature Range:  $\leq 80^{\circ}\text{C}$

## ► 水系统阀门系列 Water System Valve Series



**WD371F 无销四氟覆层对夹蝶阀**  
No pin PTFE coatings clip on butterfly valve

公称通径: DN50~600mm

公称压力: PN1.0~1.6MPa

适用介质: 水、污水、海水等

适用温度:  $\leq 150^{\circ}\text{C}$

Nominal Diameter: DN50~600mm

Nominal Pressure: PN1.0~1.6MPa

Mediums: Water, sewage, sea water etc

Temperature Range:  $\leq 150^{\circ}\text{C}$



**LTD371X LT型蜗轮传动单夹式蝶阀**  
LT type worm gear drive type butterfly valve

公称通径: DN50~600mm

公称压力: PN1.0~1.6MPa

适用介质: 水、污水、海水等

适用温度:  $\leq 80^{\circ}\text{C}$

Nominal Diameter: DN50~600mm

Nominal Pressure: PN1.0~1.6MPa

Mediums: Water, sewage, sea water etc

Temperature Range:  $\leq 80^{\circ}\text{C}$



**D671F 气动对夹式蝶阀**  
Pneumatic clamp type butterfly valve

公称通径: DN50~600mm

公称压力: PN1.0~1.6MPa

适用介质: 水、污水、海水等

适用温度:  $\leq 150^{\circ}\text{C}$

Nominal Diameter: DN50~600mm

Nominal Pressure: PN1.0~1.6MPa

Mediums: Water, sewage, sea water etc

Temperature Range:  $\leq 150^{\circ}\text{C}$



**D971X 软密封对夹电动蝶阀**  
Soft seal electric butterfly valve

公称通径: DN50~1200mm

公称压力: PN1.0~1.6MPa

适用介质: 水、污水、海水等

适用温度:  $\leq 80^{\circ}\text{C}$

Nominal Diameter: DN50~1200mm

Nominal Pressure: PN1.0~1.6MPa

Mediums: Water, sewage, sea water etc

Temperature Range:  $\leq 80^{\circ}\text{C}$



**D71X 手动防结露蝶阀**  
Anti condensation manual butterfly valve

公称通径: DN50~600mm

公称压力: PN1.0~1.6MPa

适用介质: 水、污水、海水等

适用温度:  $\leq 80^{\circ}\text{C}$

Nominal Diameter: DN50~600mm

Nominal Pressure: PN1.0~1.6MPa

Mediums: Water, sewage, sea water etc

Temperature Range:  $\leq 80^{\circ}\text{C}$



**D341X 蜗轮传动法兰蝶阀**  
Worm gear flange butterfly valve

公称通径: DN50~1200mm

公称压力: PN1.0~1.6MPa

适用介质: 水、污水、海水等

适用温度:  $\leq 80^{\circ}\text{C}$

Nominal Diameter: DN50~1200mm

Nominal Pressure: PN1.0~1.6MPa

Mediums: Water, sewage, sea water etc

Temperature Range:  $\leq 80^{\circ}\text{C}$



D341X 软密封加长杆法兰蝶阀  
Soft seal extended stem flange butterfly valve

公称通径: DN50~1200mm

公称压力: PN1.0~1.6MPa

适用介质: 水、污水、海水等

适用温度:  $\leq 80^{\circ}\text{C}$

Nominal Diameter: DN50~1200mm

Nominal Pressure: PN1.0~1.6MPa

Mediums: Water, sewage, sea water etc

Temperature Range:  $\leq 80^{\circ}\text{C}$



SD341X 软密封法兰伸缩蝶阀  
Flexible seal flange telescopic butterfly valve

公称通径: DN50~1200mm

公称压力: PN1.0~1.6MPa

适用介质: 水、污水、海水等

适用温度:  $\leq 80^{\circ}\text{C}$

Nominal Diameter: DN50~1200mm

Nominal Pressure: PN1.0~1.6MPa

Mediums: Water, sewage, sea water etc

Temperature Range:  $\leq 80^{\circ}\text{C}$



D41F 不锈钢法兰蝶阀  
Stainless steel flange butterfly valve

公称通径: DN50~1200mm

公称压力: PN1.0~1.6MPa

适用介质: 水、污水、海水等

适用温度:  $\leq 150^{\circ}\text{C}$

Nominal Diameter: DN50~1200mm

Nominal Pressure: PN1.0~1.6MPa

Mediums: Water, sewage, sea water etc

Temperature Range:  $\leq 150^{\circ}\text{C}$



D342X 蜗轮传动法兰偏心蝶阀  
Worm gear flange eccentric butterfly valve

公称通径: DN100~3000mm

公称压力: PN1.0~1.6MPa

适用介质: 水、污水、海水等

适用温度:  $\leq 80^{\circ}\text{C}$

Nominal Diameter: DN100~3000mm

Nominal Pressure: PN1.0~1.6MPa

Mediums: Water, sewage, sea water etc

Temperature Range:  $\leq 80^{\circ}\text{C}$



D641X 气动法兰蝶阀  
Pneumatic flange butterfly valve

公称通径: DN50~1200mm

公称压力: PN1.0~1.6MPa

适用介质: 水、污水、海水等

适用温度:  $\leq 80^{\circ}\text{C}$

Nominal Diameter: DN50~1200mm

Nominal Pressure: PN1.0~1.6MPa

Mediums: Water, sewage, sea water etc

Temperature Range:  $\leq 80^{\circ}\text{C}$



D941X 电动法兰蝶阀  
Electric flange butterfly valve

公称通径: DN50~1200mm

公称压力: PN1.0~1.6MPa

适用介质: 水、污水、海水等

适用温度:  $\leq 80^{\circ}\text{C}$

Nominal Diameter: DN50~1200mm

Nominal Pressure: PN1.0~1.6MPa

Mediums: Water, sewage, sea water etc

Temperature Range:  $\leq 80^{\circ}\text{C}$

## ► 水系统阀门系列 Water System Valve Series



**D943H 硬密封三偏心法兰蝶阀**  
Hard seal triple eccentric flange butterfly valve

公称通径: DN50~3000mm

公称压力: PN1.0~4.0MPa

适用介质: 水、蒸汽、油品等

适用温度:  $\leq 425^{\circ}\text{C}$

Nominal Diameter: DN50~3000mm

Nominal Pressure: PN1.0~4.0MPa

Mediums: Water, steam, oil etc

Temperature Range:  $\leq 425^{\circ}\text{C}$



**HQ41X 球型止回阀**  
Ball check valve

公称通径: DN50~300mm

公称压力: PN1.0~2.5MPa

适用介质: 水、污水、海水等

适用温度:  $\leq 80^{\circ}\text{C}$

Nominal Diameter: DN50~300mm

Nominal Pressure: PN1.0~2.5MPa

Mediums: Water, sewage, sea water etc

Temperature Range:  $\leq 80^{\circ}\text{C}$



**HQ44X 球形止回阀**  
Ball check valves

公称通径: DN50~400mm

公称压力: PN1.0~2.5MPa

适用介质: 水、污水、海水等

适用温度:  $\leq 80^{\circ}\text{C}$

Nominal Diameter: DN50~400mm

Nominal Pressure: PN1.0~2.5MPa

Mediums: Water, sewage, sea water etc

Temperature Range:  $\leq 80^{\circ}\text{C}$



**HQ45X 微阻球形止回阀**  
Microresistance ball check valve

公称通径: DN350~600mm

公称压力: PN1.0~2.5MPa

适用介质: 水、污水、海水等

适用温度:  $\leq 80^{\circ}\text{C}$

Nominal Diameter: DN350~600mm

Nominal Pressure: PN1.0~2.5MPa

Mediums: Water, sewage, sea water etc

Temperature Range:  $\leq 80^{\circ}\text{C}$



**DRVZ 静音止回阀**  
Silent Check Valve

公称通径: DN50~350mm

公称压力: PN1.0~2.5MPa

适用介质: 水、污水、海水等

适用温度:  $\leq 80^{\circ}\text{C}$

Nominal Diameter: DN50~350mm

Nominal Pressure: PN1.0~2.5MPa

Mediums: Water, sewage, sea water etc

Temperature Range:  $\leq 80^{\circ}\text{C}$



**HC41X 消声止回阀**  
Noise Elimination Check Valve

公称通径: DN50~600mm

公称压力: PN1.0~2.5MPa

适用介质: 水、污水、海水等

适用温度:  $\leq 80^{\circ}\text{C}$

Nominal Diameter: DN50~600mm

Nominal Pressure: PN1.0~2.5MPa

Mediums: Water, sewage, sea water etc

Temperature Range:  $\leq 80^{\circ}\text{C}$

## ► 水系统阀门系列 Water System Valve Series



**H44X橡胶瓣止回阀**  
Rubber Disc Check Valve

公称通径: DN40 ~ 600mm

公称压力: PN1.0 ~ 1.6MPa

适用介质: 水、污水、海水等

适用温度:  $\leq 80^{\circ}\text{C}$

Nominal Diameter: DN40 ~ 600mm

Nominal Pressure: PN1.0 ~ 1.6MPa

Mediums: Water, sewage, sea water etc

Temperature Range:  $\leq 80^{\circ}\text{C}$



**HH44X微阻缓闭止回阀**  
Micro resistance slow close check valve

公称通径: DN50 ~ 700mm

公称压力: PN1.0 ~ 2.5MPa

适用介质: 水、污水、海水等

适用温度:  $\leq 80^{\circ}\text{C}$

Nominal Diameter: DN50 ~ 700mm

Nominal Pressure: PN1.0 ~ 2.5MPa

Mediums: Water, sewage, sea water etc

Temperature Range:  $\leq 80^{\circ}\text{C}$



**HH49X蝶型缓闭止回阀**  
Butterfly slow closing check valve

公称通径: DN50 ~ 1400mm

公称压力: PN1.0 ~ 2.5MPa

适用介质: 水、污水、海水等

适用温度:  $\leq 80^{\circ}\text{C}$

Nominal Diameter: DN50 ~ 1400mm

Nominal Pressure: PN1.0 ~ 2.5MPa

Mediums: Water, sewage, sea water etc

Temperature Range:  $\leq 80^{\circ}\text{C}$



**HH47H/X蝶型缓冲止回阀**  
Butterfly cushion check valve

公称通径: DN150 ~ 1600mm

公称压力: PN1.0 ~ 2.5MPa

适用介质: 水、污水、海水等

适用温度:  $\leq 80^{\circ}\text{C}$

Nominal Diameter: DN150 ~ 1600mm

Nominal Pressure: PN1.0 ~ 2.5MPa

Mediums: Water, sewage, sea water etc

Temperature Range:  $\leq 80^{\circ}\text{C}$



**H76H/X对夹式止回阀**  
Wafer check valve

公称通径: DN50 ~ 400mm

公称压力: PN1.0 ~ 1.6MPa

适用介质: 水、污水、海水等

适用温度:  $\leq 80^{\circ}\text{C}$

Nominal Diameter: DN50 ~ 400mm

Nominal Pressure: PN1.0 ~ 1.6MPa

Mediums: Water, sewage, sea water etc

Temperature Range:  $\leq 80^{\circ}\text{C}$



**JM742X隔膜式池底卸泥阀**  
Diaphragm type bottom sludge discharge valve

公称通径: DN80 ~ 400mm

公称压力: PN1.0 ~ 2.5MPa

适用介质: 水、污水

适用温度:  $\leq 80^{\circ}\text{C}$

Nominal Diameter: DN80 ~ 400mm

Nominal Pressure: PN1.0 ~ 2.5MPa

Mediums: Water, sewage

Temperature Range:  $\leq 80^{\circ}\text{C}$

## ► 水系统阀门系列 Water System Valve Series



**J744X/J644X 液压、气动角式快开排泥阀**  
Hydraulic and pneumatic angle quick opening sludge discharge valve

公称通径: DN100~400mm

公称压力: PN1.0~1.6MPa

适用介质: 水、污水

适用温度:  $\leq 80^{\circ}\text{C}$

Nominal Diameter: DN100~400mm

Nominal Pressure: PN1.0~1.6MPa

Mediums: Water, sewage

Temperature Range:  $\leq 80^{\circ}\text{C}$



**JM744X/JM644X 快开排泥阀**  
Quick opening of sludge discharge valve

公称通径: DN100~400mm

公称压力: PN1.0~1.6MPa

适用介质: 水、污水

适用温度:  $\leq 80^{\circ}\text{C}$

Nominal Diameter: DN100~400mm

Nominal Pressure: PN1.0~1.6MPa

Mediums: Water, sewage

Temperature Range:  $\leq 80^{\circ}\text{C}$



**JM744X/JM644X 膜片式快开排泥阀**  
Diaphragm type quick opening sludge discharge valve

公称通径: DN100~400mm

公称压力: PN1.0~2.5MPa

适用介质: 水、污水

适用温度:  $\leq 80^{\circ}\text{C}$

Nominal Diameter: DN100~400mm

Nominal Pressure: PN1.0~2.5MPa

Mediums: Water, sewage

Temperature Range:  $\leq 80^{\circ}\text{C}$



**ARVX 微量排气阀**  
Micro exhaust valve

公称通径: DN15~25mm

公称压力: PN1.0~1.6MPa

适用介质: 水

适用温度:  $\leq 80^{\circ}\text{C}$

Nominal Diameter: DN15~25mm

Nominal Pressure: PN1.0~1.6MPa

Mediums: Water

Temperature Range:  $\leq 80^{\circ}\text{C}$



**QB2/P2 双口排气阀**  
Double port exhaust valve

公称通径: DN50~200mm

公称压力: PN1.0~2.5MPa

适用介质: 水

适用温度:  $\leq 80^{\circ}\text{C}$

Nominal Diameter: DN50~200mm

Nominal Pressure: PN1.0~2.5MPa

Mediums: Water

Temperature Range:  $\leq 80^{\circ}\text{C}$



**CARX 复合式排气阀**  
Compound exhaust valve

公称通径: DN50~200mm

公称压力: PN1.0~2.5MPa

适用介质: 水、污水

适用温度:  $\leq 80^{\circ}\text{C}$

Nominal Diameter: DN50~200mm

Nominal Pressure: PN1.0~2.5MPa

Mediums: Water, sewage

Temperature Range:  $\leq 80^{\circ}\text{C}$

## ► 水系统阀门系列 Water System Valve Series



**QB1 单口排气阀**  
Single port exhaust valve

公称通径: DN50~200mm

公称压力: PN1.0~1.6MPa

适用介质: 水

适用温度:  $\leq 80^{\circ}\text{C}$

Nominal Diameter: DN50~200mm

Nominal Pressure: PN1.0~1.6MPa

Mediums: Water

Temperature Range:  $\leq 80^{\circ}\text{C}$



**SCAR 污水复合式排气阀**  
Sewage compound exhaust valve

公称通径: DN50~200mm

公称压力: PN1.0~2.5MPa

适用介质: 水、污水

适用温度:  $\leq 80^{\circ}\text{C}$

Nominal Diameter: DN50~200mm

Nominal Pressure: PN1.0~2.5MPa

Mediums: Water, sewage

Temperature Range:  $\leq 80^{\circ}\text{C}$



**新型双筒排气阀**  
New double cylinder exhaust valve

公称通径: DN50~300mm

公称压力: PN1.0~2.5MPa

适用介质: 水

适用温度:  $\leq 80^{\circ}\text{C}$

Nominal Diameter: DN50~300mm

Nominal Pressure: PN1.0~2.5MPa

Mediums: Water

Temperature Range:  $\leq 80^{\circ}\text{C}$



**QSP型全压高速排气阀**  
Full pressure high speed exhaust valve

公称通径: DN50~200mm

公称压力: PN1.0~2.5MPa

适用介质: 水

适用温度:  $\leq 80^{\circ}\text{C}$

Nominal Diameter: DN50~200mm

Nominal Pressure: PN1.0~2.5MPa

Mediums: Water

Temperature Range:  $\leq 80^{\circ}\text{C}$



**CARX 复合排气阀**  
Composite exhaust valve

公称通径: DN50~200mm

公称压力: PN1.0~2.5MPa

适用介质: 水

适用温度:  $\leq 80^{\circ}\text{C}$

Nominal Diameter: DN50~200mm

Nominal Pressure: PN1.0~2.5MPa

Mediums: Water

Temperature Range:  $\leq 80^{\circ}\text{C}$



**四合一多功能阀**  
Four in one multifunctional valve

公称通径: DN15~350mm

公称压力: PN1.0~2.5MPa

适用介质: 水

适用温度:  $\leq 80^{\circ}\text{C}$

Nominal Diameter: DN15~350mm

Nominal Pressure: PN1.0~2.5MPa

Mediums: Water

Temperature Range:  $\leq 80^{\circ}\text{C}$

## ► 水系统阀门系列 Water System Valve Series



**LHS941X调流阀**  
Throttle valve

公称通径: DN100~1800mm

公称压力: PN1.0~2.5MPa

适用介质: 水

适用温度:  $\leq 80^{\circ}\text{C}$

Nominal Diameter: DN100~1800mm

Nominal Pressure: PN1.0~2.5MPa

Mediums: Water

Temperature Range:  $\leq 80^{\circ}\text{C}$



**锥形阀**  
Conical valve

公称通径: DN200~2000mm

公称压力: PN1.0~2.5MPa

适用介质: 水

适用温度:  $\leq 80^{\circ}\text{C}$

Nominal Diameter: DN200~2000mm

Nominal Pressure: PN1.0~2.5MPa

Mediums: Water

Temperature Range:  $\leq 80^{\circ}\text{C}$



**PQ340H手动偏心半球阀**  
Manual eccentric hemisphere valve

公称通径: DN50~1200mm

公称压力: PN1.0~2.5MPa

适用介质: 水、蒸汽、油品等

适用温度:  $\leq 425^{\circ}\text{C}$

Nominal Diameter: DN50~1200mm

Nominal Pressure: PN1.0~2.5MPa

Mediums: Water, steam, oil etc

Temperature Range:  $\leq 425^{\circ}\text{C}$



**PQ940H电动偏心半球阀**  
Electric eccentric hemisphere valve

公称通径: DN50~1200mm

公称压力: PN1.0~2.5MPa

适用介质: 水、蒸汽、油品等

适用温度:  $\leq 425^{\circ}\text{C}$

Nominal Diameter: DN50~1200mm

Nominal Pressure: PN1.0~2.5MPa

Mediums: Water, steam, oil etc

Temperature Range:  $\leq 425^{\circ}\text{C}$



**SY4P Y型过滤器**  
Y-type filter

公称通径: DN50~600mm

公称压力: PN1.0~2.5MPa

适用介质: 水

适用温度:  $\leq 80^{\circ}\text{C}$

Nominal Diameter: DN50~600mm

Nominal Pressure: PN1.0~2.5MPa

Mediums: Water

Temperature Range:  $\leq 80^{\circ}\text{C}$



**SBL14蓝式过滤器**  
Blue Style Filter

公称通径: DN50~600mm

公称压力: PN1.0~2.5MPa

适用介质: 水、蒸汽、油品等

适用温度:  $\leq 350^{\circ}\text{C}$

Nominal Diameter: DN50~600mm

Nominal Pressure: PN1.0~2.5MPa

Mediums: Water, steam, oil etc

Temperature Range:  $\leq 350^{\circ}\text{C}$

## ► 水系统阀门系列 Water System Valve Series



**T型过滤器**  
T-type filter

公称通径: DN50~600mm

公称压力: PN1.0~2.5MPa

适用介质: 水、蒸汽、油品等

适用温度:  $\leq 350^{\circ}\text{C}$

Nominal Diameter: DN50~600mm

Nominal Pressure: PN1.0~2.5MPa

Mediums: Water, steam, oil etc

Temperature Range:  $\leq 350^{\circ}\text{C}$



**LHS743X低阻力倒流防止器**  
Low resistance backflow preventer

公称通径: DN40~500mm

公称压力: PN1.0~2.5MPa

适用介质: 水

适用温度:  $\leq 80^{\circ}\text{C}$

Nominal Diameter: DN40~500mm

Nominal Pressure: PN1.0~2.5MPa

Mediums: Water

Temperature Range:  $\leq 80^{\circ}\text{C}$



**HS41X倒流防止器**  
Backflow preventer

公称通径: DN40~500mm

公称压力: PN1.0~2.5MPa

适用介质: 水、污水

适用温度:  $\leq 80^{\circ}\text{C}$

Nominal Diameter: DN40~500mm

Nominal Pressure: PN1.0~2.5MPa

Mediums: Water, sewage

Temperature Range:  $\leq 80^{\circ}\text{C}$



**HS41X-A倒流防止器**  
Backflow preventer

公称通径: DN40~500mm

公称压力: PN1.0~2.5MPa

适用介质: 水、污水

适用温度:  $\leq 80^{\circ}\text{C}$

Nominal Diameter: DN40~500mm

Nominal Pressure: PN1.0~2.5MPa

Mediums: Water, sewage

Temperature Range:  $\leq 80^{\circ}\text{C}$



**Y42F/X减压阀**  
Regulator Valve

公称通径: DN15~600mm

公称压力: PN1.0~2.5MPa

适用介质: 水

适用温度:  $\leq 80^{\circ}\text{C}$

Nominal Diameter: DN15~600mm

Nominal Pressure: PN1.0~2.5MPa

Mediums: Water

Temperature Range:  $\leq 80^{\circ}\text{C}$



**YZ11X不锈钢支管减压阀**  
Stainless steel pipe pressure reducing valve

公称通径: DN15~50mm

公称压力: PN1.0~2.5MPa

适用介质: 水

适用温度:  $\leq 80^{\circ}\text{C}$

Nominal Diameter: DN15~50mm

Nominal Pressure: PN1.0~2.5MPa

Mediums: Water

Temperature Range:  $\leq 80^{\circ}\text{C}$

## ► 水系统阀门系列 Water System Valve Series



**200P减压阀**  
Pressure reducing valve

公称通径: DN15~50mm  
公称压力: PN1.0~1.6MPa  
适用介质: 水  
适用温度:  $\leq 80^{\circ}\text{C}$

Nominal Diameter: DN15~50mm  
Nominal Pressure: PN1.0~1.6MPa  
Mediums: Water  
Temperature Range:  $\leq 80^{\circ}\text{C}$



**YB43X固定比例式减压阀**  
Fixed proportional pressure reducing valve

公称通径: DN50~400mm  
公称压力: PN1.0~1.6MPa  
适用介质: 水  
适用温度:  $\leq 80^{\circ}\text{C}$

Nominal Diameter: DN50~400mm  
Nominal Pressure: PN1.0~1.6MPa  
Mediums: Water  
Temperature Range:  $\leq 80^{\circ}\text{C}$



**ZYA9000型水锤吸纳器**  
ZYA9000 type water hammer

公称通径: DN25~600mm  
公称压力: PN1.0~2.5MPa  
适用介质: 水  
适用温度:  $\leq 80^{\circ}\text{C}$

Nominal Diameter: DN25~600mm  
Nominal Pressure: PN1.0~2.5MPa  
Mediums: Water  
Temperature Range:  $\leq 80^{\circ}\text{C}$



**FA49H防爆波安全阀**  
Explosion proof safety valve

公称通径: DN100~400mm  
公称压力: PN1.0~1.6MPa  
适用介质: 水  
适用温度:  $\leq 80^{\circ}\text{C}$

Nominal Diameter: DN100~400mm  
Nominal Pressure: PN1.0~1.6MPa  
Mediums: Water  
Temperature Range:  $\leq 80^{\circ}\text{C}$



**JR金属软管**  
Metal hose

公称通径: DN25~600mm  
公称压力: PN1.0~2.5MPa  
适用介质: 水  
适用温度:  $\leq 80^{\circ}\text{C}$

Nominal Diameter: DN25~600mm  
Nominal Pressure: PN1.0~2.5MPa  
Mediums: Water  
Temperature Range:  $\leq 80^{\circ}\text{C}$



**JDZ 波纹管补偿器**  
Bellows compensator

公称通径: DN25~600mm  
公称压力: PN1.0~2.5MPa  
适用介质: 水  
适用温度:  $\leq 80^{\circ}\text{C}$

Nominal Diameter: DN25~600mm  
Nominal Pressure: PN1.0~2.5MPa  
Mediums: Water  
Temperature Range:  $\leq 80^{\circ}\text{C}$

## ► 水系统阀门系列 Water System Valve Series



**可曲绕双球体橡胶接头**  
Can bend double ball rubber joints

公称通径: DN15~50mm  
公称压力: PN1.0~1.6MPa  
适用介质: 水  
适用温度:  $\leq 80^{\circ}\text{C}$

Nominal Diameter: DN15~50mm  
Nominal Pressure: PN1.0~1.6MPa  
Mediums: Water  
Temperature Range:  $\leq 80^{\circ}\text{C}$



**KXT橡胶接头**  
Rubber Joint

公称通径: DN40~800mm  
公称压力: PN1.0~2.5MPa  
适用介质: 水  
适用温度:  $\leq 80^{\circ}\text{C}$


Nominal Diameter: DN40~800mm  
Nominal Pressure: PN1.0~2.5MPa  
Mediums: Water  
Temperature Range:  $\leq 80^{\circ}\text{C}$



**VSSJA-2型/B2双法兰式限位伸缩接头**  
Double flange limited expansion joint

公称通径: DN50~3000mm  
公称压力: PN1.0~2.5MPa  
适用介质: 水  
适用温度:  $\leq 80^{\circ}\text{C}$

Nominal Diameter: DN50~3000mm  
Nominal Pressure: PN1.0~2.5MPa  
Mediums: water  
Temperature Range:  $\leq 80^{\circ}\text{C}$



**VSSJAF/C2F型双法兰传力接头**  
Double flange force transfer joint

公称通径: DN50~3000mm  
公称压力: PN1.0~2.5MPa  
适用介质: 水  
适用温度:  $\leq 80^{\circ}\text{C}$

Nominal Diameter: DN50~3000mm  
Nominal Pressure: PN1.0~2.5MPa  
Mediums: Water  
Temperature Range:  $\leq 80^{\circ}\text{C}$



**VSSJA型/AF型法兰式松套伸缩接头**  
Flange loose sleeve expansion joint

公称通径: DN50~3000mm  
公称压力: PN1.0~2.5MPa  
适用介质: 水  
适用温度:  $\leq 80^{\circ}\text{C}$

Nominal Diameter: DN50~3000mm  
Nominal Pressure: PN1.0~2.5MPa  
Mediums: Water  
Temperature Range:  $\leq 80^{\circ}\text{C}$



**LDF系列智能电磁流量计**  
LDF series intelligent electromagnetic flowmeter

公称通径: DN25~500mm  
公称压力: PN1.0~4.0MPa  
适用介质: 水  
适用温度:  $\leq 80^{\circ}\text{C}$

Nominal Diameter: DN25~500mm  
Nominal Pressure: PN1.0~4.0MPa  
Mediums: Water  
Temperature Range:  $\leq 80^{\circ}\text{C}$

## ► 水系统阀门系列 Water System Valve Series



**智能涡街流量计**  
Intelligent vortex flowmeter

公称通径: DN15~200mm

公称压力: PN1.0~4.0MPa

适用介质: 水

适用温度:  $\leq 80^{\circ}\text{C}$

Nominal Diameter: DN15~200mm

Nominal Pressure: PN1.0~4.0MPa

Mediums: Water

Temperature Range:  $\leq 80^{\circ}\text{C}$



**不锈钢闸门**  
Stainless steel gate

公称通径: DN50~4000mm

公称压力: PN0.6~2.5MPa

适用介质: 水、污水、海水等

适用温度:  $\leq 80^{\circ}\text{C}$

Nominal Diameter: DN50~4000mm

Nominal Pressure: PN0.6~2.5MPa

Mediums: Water, sewage, sea water etc

Temperature Range:  $\leq 80^{\circ}\text{C}$



**气动不锈钢闸门**  
Pneumatic stainless steel gate

公称通径: DN50~4000mm

公称压力: PN0.6~2.5MPa

适用介质: 水、污水、海水等

适用温度:  $\leq 80^{\circ}\text{C}$

Nominal Diameter: DN50~4000mm

Nominal Pressure: PN0.6~2.5MPa

Mediums: Water, sewage, sea water etc

Temperature Range:  $\leq 80^{\circ}\text{C}$



**HDPE拍门**  
Knock on the door

公称通径: DN50~4000mm

公称压力: PN0.6~2.5MPa

适用介质: 水、污水、海水等

适用温度:  $\leq 80^{\circ}\text{C}$

Nominal Diameter: DN50~4000mm

Nominal Pressure: PN0.6~2.5MPa

Mediums: Water, sewage, sea water etc

Temperature Range:  $\leq 80^{\circ}\text{C}$



**SYZ铸铁镶铜闸门**  
Cast iron copper inlaid gate

公称通径: DN200~3000mm

公称压力: PN0.6~2.5MPa

适用介质: 水、污水、海水等

适用温度:  $\leq 80^{\circ}\text{C}$

Nominal Diameter: DN200~3000mm

Nominal Pressure: PN0.6~2.5MPa

Mediums: Water, sewage, sea water etc

Temperature Range:  $\leq 80^{\circ}\text{C}$



**真空破坏阀**  
Vacuum breaker valve

公称通径: DN50~3200mm

公称压力: PN0.25~4.0MPa

适用介质: 水

适用温度:  $\leq 80^{\circ}\text{C}$

Nominal Diameter: DN50~3200mm

Nominal Pressure: PN0.25~4.0MPa

Mediums: Water

Temperature Range:  $\leq 80^{\circ}\text{C}$

## ► 消防阀门系列

Fire fighting valve series



**Z41X法兰明杆闸阀**  
Flange rising stem gate valve

公称通径: DN50~400mm

公称压力: PN1.0~1.6MPa

适用介质: 水

适用温度:  $\leq 80^{\circ}\text{C}$

Nominal Diameter: DN50~400mm

Nominal Pressure: PN1.0~1.6MPa

Mediums: Water

Temperature Range:  $\leq 80^{\circ}\text{C}$



**XZ45X消防信号闸阀**  
Fire signal gate valve

公称通径: DN50~400mm

公称压力: PN1.0~1.6MPa

适用介质: 水

适用温度:  $\leq 80^{\circ}\text{C}$

Nominal Diameter: DN50~400mm

Nominal Pressure: PN1.0~1.6MPa

Mediums: Water

Temperature Range:  $\leq 80^{\circ}\text{C}$



**XZ45X消防信号闸阀**  
Fire signal gate valve

公称通径: DN50~400mm

公称压力: PN1.0~1.6MPa

适用介质: 水

适用温度:  $\leq 80^{\circ}\text{C}$

Nominal Diameter: DN50~400mm

Nominal Pressure: PN1.0~1.6MPa

Mediums: Water

Temperature Range:  $\leq 80^{\circ}\text{C}$



**Z85X沟槽软密封暗杆闸阀**  
Groove soft seal non-rising stem gate valves

公称通径: DN50~300mm

公称压力: PN1.0~1.6MPa

适用介质: 水

适用温度:  $\leq 80^{\circ}\text{C}$

Nominal Diameter: DN50~300mm

Nominal Pressure: PN1.0~1.6MPa

Mediums: Water

Temperature Range:  $\leq 80^{\circ}\text{C}$



**Z81X沟槽明杆闸阀**  
Groove rising stem gate valves

公称通径: DN50~300mm

公称压力: PN1.0~1.6MPa

适用介质: 水

适用温度:  $\leq 80^{\circ}\text{C}$

Nominal Diameter: DN50~300mm

Nominal Pressure: PN1.0~1.6MPa

Mediums: Water

Temperature Range:  $\leq 80^{\circ}\text{C}$



**XZ85X沟槽信号闸阀**  
Grooved signal gate valve

公称通径: DN50~300mm

公称压力: PN1.0~1.6MPa

适用介质: 水

适用温度:  $\leq 80^{\circ}\text{C}$

Nominal Diameter: DN50~300mm

Nominal Pressure: PN1.0~1.6MPa

Mediums: Water

Temperature Range:  $\leq 80^{\circ}\text{C}$

## ► 消防阀门系列 Fire fighting valve series



**XD371X信号蝶阀**  
Signal butterfly valve

公称通径: DN50~300mm

公称压力: PN1.0~1.6MPa

适用介质: 水

适用温度:  $\leq 80^{\circ}\text{C}$

Nominal Diameter: DN50~300mm

Nominal Pressure: PN1.0~1.6MPa

Mediums: Water

Temperature Range:  $\leq 80^{\circ}\text{C}$



**D81X卡箍手柄蝶阀**  
The clamp handle butterfly valve

公称通径: DN50~300mm

公称压力: PN1.0~1.6MPa

适用介质: 水

适用温度:  $\leq 80^{\circ}\text{C}$

Nominal Diameter: DN50~300mm

Nominal Pressure: PN1.0~1.6MPa

Mediums: Water

Temperature Range:  $\leq 80^{\circ}\text{C}$



**D381X沟槽蜗轮蝶阀**  
Groove worm gear butterfly valve

公称通径: DN50~200mm

公称压力: PN1.0~1.6MPa

适用介质: 水

适用温度:  $\leq 80^{\circ}\text{C}$

Nominal Diameter: DN50~200mm

Nominal Pressure: PN1.0~1.6MPa

Mediums: Water

Temperature Range:  $\leq 80^{\circ}\text{C}$



**XD381X沟槽信号蝶阀**  
Groove signal butterfly

公称通径: DN50~200mm

公称压力: PN1.0~1.6MPa

适用介质: 水

适用温度:  $\leq 80^{\circ}\text{C}$

Nominal Diameter: DN50~200mm

Nominal Pressure: PN1.0~1.6MPa

Mediums: Water

Temperature Range:  $\leq 80^{\circ}\text{C}$



**HC81X沟槽消声止回阀**  
Grooved check valve

公称通径: DN50~200mm

公称压力: PN1.0~1.6MPa

适用介质: 水

适用温度:  $\leq 80^{\circ}\text{C}$

Nominal Diameter: DN50~200mm

Nominal Pressure: PN1.0~1.6MPa

Mediums: Water

Temperature Range:  $\leq 80^{\circ}\text{C}$



**GH84X沟槽橡胶瓣止回阀**  
Grooved rubber disc check valve

公称通径: DN50~200mm

公称压力: PN1.0~1.6MPa

适用介质: 水

适用温度:  $\leq 80^{\circ}\text{C}$

Nominal Diameter: DN50~200mm

Nominal Pressure: PN1.0~1.6MPa

Mediums: Water

Temperature Range:  $\leq 80^{\circ}\text{C}$

## ► 消防阀门系列

Fire fighting valve series



**G100X 沟槽遥控浮球阀**  
Groove remote control float valve

公称通径: DN50~200mm

公称压力: PN1.0~2.5Mpa

适用介质: 水

适用温度:  $\leq 80^{\circ}\text{C}$

Nominal Diameter: DN50~200mm

Nominal Pressure: PN1.0~2.5Mpa

Mediums: Water

Temperature Range:  $\leq 80^{\circ}\text{C}$



**200X 沟槽减压阀**  
Grooved pressure relief valve

公称通径: DN50~200mm

公称压力: PN1.0~2.5Mpa

适用介质: 水

适用温度:  $\leq 80^{\circ}\text{C}$

Nominal Diameter: DN50~200mm

Nominal Pressure: PN1.0~2.5Mpa

Mediums: Water

Temperature Range:  $\leq 80^{\circ}\text{C}$



**G300X 沟槽缓闭止回阀**  
Groove slow closing check valve

公称通径: DN50~200mm

公称压力: PN1.0~2.5Mpa

适用介质: 水

适用温度:  $\leq 80^{\circ}\text{C}$

Nominal Diameter: DN50~200mm

Nominal Pressure: PN1.0~2.5Mpa

Mediums: Water

Temperature Range:  $\leq 80^{\circ}\text{C}$



**500X 沟槽泄压阀**  
Groove pressure relief valve

公称通径: DN50~200mm

公称压力: PN1.0~2.5Mpa

适用介质: 水

适用温度:  $\leq 80^{\circ}\text{C}$

Nominal Diameter: DN50~200mm

Nominal Pressure: PN1.0~2.5Mpa

Mediums: Water

Temperature Range:  $\leq 80^{\circ}\text{C}$



**G600X 沟槽水力电动控制阀**  
Groove hydraulic electric control valve

公称通径: DN50~200mm

公称压力: PN1.0~2.5Mpa

适用介质: 水

适用温度:  $\leq 80^{\circ}\text{C}$

Nominal Diameter: DN50~200mm

Nominal Pressure: PN1.0~2.5Mpa

Mediums: Water

Temperature Range:  $\leq 80^{\circ}\text{C}$



**G106X 沟槽水力电动控制阀**  
Groove hydraulic electric control valve

公称通径: DN50~200mm

公称压力: PN1.0~2.5Mpa

适用介质: 水

适用温度:  $\leq 80^{\circ}\text{C}$

Nominal Diameter: DN50~200mm

Nominal Pressure: PN1.0~2.5Mpa

Mediums: Water

Temperature Range:  $\leq 80^{\circ}\text{C}$

## ► 消防阀门系列 Fire fighting valve series



**GL81 H沟槽过滤器**  
Groove filter

公称通径: DN50~200mm

公称压力: PN1.0~1.6MPa

适用介质: 水


适用温度:  $\leq 80^{\circ}\text{C}$

Nominal Diameter: DN50~200mm

Nominal Pressure: PN1.0~1.6MPa

Mediums: Water

Temperature Range:  $\leq 80^{\circ}\text{C}$



**旋流防止器**  
Cyclone preventer

公称通径: DN50~200mm

公称压力: PN1.0~1.6MPa

适用介质: 水

适用温度:  $\leq 80^{\circ}\text{C}$

Nominal Diameter: DN50~200mm

Nominal Pressure: PN1.0~1.6MPa

Mediums: Water

Temperature Range:  $\leq 80^{\circ}\text{C}$



**超声波流量计**  
Ultrasonic flowmeter

公称通径: DN50~300mm

公称压力: PN1.0~1.6MPa

适用介质: 水

适用温度:  $\leq 80^{\circ}\text{C}$

Nominal Diameter: DN50~300mm

Nominal Pressure: PN1.0~1.6MPa

Mediums: Water

Temperature Range:  $\leq 80^{\circ}\text{C}$



**消防流量开关**  
Fire control flow switch

公称通径: DN50~200mm

公称压力: PN1.0~1.6MPa

适用介质: 水

适用温度:  $\leq 80^{\circ}\text{C}$

Nominal Diameter: DN50~200mm

Nominal Pressure: PN1.0~1.6MPa

Mediums: Water

Temperature Range:  $\leq 80^{\circ}\text{C}$



**消防压力开关**  
Fire pressure switch

公称通径: DN50~200mm

公称压力: PN1.0~1.6MPa

适用介质: 水

适用温度:  $\leq 80^{\circ}\text{C}$

Nominal Diameter: DN50~200mm

Nominal Pressure: PN1.0~1.6MPa

Mediums: Water

Temperature Range:  $\leq 80^{\circ}\text{C}$



**ZSFY预作用报警阀**  
ZSFY Pre-action Alarm Valve

公称通径: DN100~200mm

公称压力: PN1.0~1.6MPa

适用介质: 水

适用温度:  $\leq 80^{\circ}\text{C}$

Nominal Diameter: DN100~200mm

Nominal Pressure: PN1.0~1.6MPa

Mediums: Water

Temperature Range:  $\leq 80^{\circ}\text{C}$

## ► 消防阀门系列 Fire fighting valve series



**ZSFZ150湿式报警阀系统**  
Wet alarm valve system

公称通径: DN100~200mm

公称压力: PN1.0~1.6MPa

适用介质: 水

适用温度:  $\leq 80^{\circ}\text{C}$

Nominal Diameter: DN100~200mm

Nominal Pressure: PN1.0~1.6MPa

Mediums: Water

Temperature Range:  $\leq 80^{\circ}\text{C}$



**ZSJZ雨淋报警阀**  
Deluge alarm valve

公称通径: DN100~200mm

公称压力: PN1.0~1.6MPa

适用介质: 水

适用温度:  $\leq 80^{\circ}\text{C}$

Nominal Diameter: DN100~200mm

Nominal Pressure: PN1.0~1.6MPa

Mediums: Water

Temperature Range:  $\leq 80^{\circ}\text{C}$

**ZSJZ水流指示器**  
Flow Indicator



**ZSJZ50-150**  
丝扣式  
Screw thread type



**ZSJZ50-200**  
鞍座式  
Saddle type



**ZSJZ50-200**  
焊接式  
Welding type



**ZSJZ50-200**  
法兰式  
Flange type

| 安装连接方式<br>Installation and connection mode | 法兰式<br>Flange type | 焊接式<br>Welding type                       | 鞍座式<br>Saddle type | 丝扣式<br>Screw thread type |
|--------------------------------------------|--------------------|-------------------------------------------|--------------------|--------------------------|
| 型号<br>Model                                | ZSJZ               | ZSJZ/H                                    | ZSJZ/A             | ZSJZ/S                   |
| 公称通径(mm)<br>Nominal diameter               |                    | DN50 DN65 DN80 DN100<br>DN125 DN150 DN200 |                    | DN50-150                 |
| 额定工作压力(MPa)<br>Rated working pressure      |                    | 1.2                                       |                    |                          |
| 灵敏度(L/Min)<br>Sensitivity                  |                    | 15 < Q < 37.5                             |                    |                          |



智能家居电动阀  
Smart home electric valve

公称通径: DN15~25mm

公称压力: PN1.6MPa

适用介质: 水

适用温度:  $\leq 80^{\circ}\text{C}$

Nominal Diameter: DN15~25mm

Nominal Pressure: PN1.6MPa

Mediums: Water

Temperature Range:  $\leq 80^{\circ}\text{C}$



CKV7电动二通球阀  
Electric two way ball valve

公称通径: DN15~40mm

公称压力: PN1.6Mpa

适用介质: 水

适用温度:  $\leq 80^{\circ}\text{C}$

Nominal Diameter: DN15~40mm

Nominal Pressure: PN1.6Mpa

Mediums: Water

Temperature Range:  $\leq 80^{\circ}\text{C}$



DQ202 电动二通球阀  
Electric two way ball valve

公称通径: DN40~50mm

公称压力: PN1.6Mpa

适用介质: 水

适用温度:  $\leq 80^{\circ}\text{C}$

Nominal Diameter: DN40~50mm

Nominal Pressure: PN1.6Mpa

Mediums: Water

Temperature Range:  $\leq 80^{\circ}\text{C}$



VA7010电动阀  
Electric valve

公称通径: DN15~25mm

公称压力: PN1.6MPa

适用介质: 水

适用温度:  $\leq 80^{\circ}\text{C}$

Nominal Diameter: DN15~25mm

Nominal Pressure: PN1.6MPa

Mediums: Water

Temperature Range:  $\leq 80^{\circ}\text{C}$



VA3000电动调节阀  
Electric control valve

公称通径: DN32~65mm

公称压力: PN1.6MPa

适用介质: 水

适用温度:  $\leq 80^{\circ}\text{C}$

Nominal Diameter: DN32~65mm

Nominal Pressure: PN1.6MPa

Mediums: Water

Temperature Range:  $\leq 80^{\circ}\text{C}$



VB7000电动调节阀  
Electric control valve

公称通径: DN32~300mm

公称压力: PN1.0~1.6Mpa

适用介质: 水

适用温度:  $\leq 80^{\circ}\text{C}$

Nominal Diameter: DN32~300mm

Nominal Pressure: PN1.0~1.6Mpa

Mediums: Water

Temperature Range:  $\leq 80^{\circ}\text{C}$



TWS系列300电热温控阀  
300 electric temperature control valve

公称通径: DN15~25mm

公称压力: PN1.6Mpa

适用介质: 水

适用温度:  $\leq 80^{\circ}\text{C}$

Nominal Diameter: DN15~25mm

Nominal Pressure: PN1.6MPa

Mediums: Water

Temperature Range:  $\leq 80^{\circ}\text{C}$



户控(区域)回水温控阀  
Household control (area)  
return water temperature control valve

公称通径: DN15~25mm

公称压力: PN1.6Mpa

适用介质: 水

适用温度:  $\leq 80^{\circ}\text{C}$

Nominal Diameter: DN15~25mm

Nominal Pressure: PN1.6MPa

Mediums: Water

Temperature Range:  $\leq 80^{\circ}\text{C}$



EDRV动态电动平衡阀  
Dynamic electric balance valve

公称通径: DN20~25mm

公称压力: PN1.6Mpa

适用介质: 水

适用温度:  $\leq 80^{\circ}\text{C}$

Nominal Diameter: DN20~25mm

Nominal Pressure: PN1.6MPa

Mediums: Water

Temperature Range:  $\leq 80^{\circ}\text{C}$



EDRV-D动态平衡电动调节阀  
Dynamic balancing electric control valve

公称通径: DN32~200mm

公称压力: PN1.0~2.5MPa

适用介质: 水

适用温度:  $\leq 80^{\circ}\text{C}$

Nominal Diameter: DN32~200mm

Nominal Pressure: PN1.0~2.5MPa

Mediums: Water

Temperature Range:  $\leq 80^{\circ}\text{C}$



多功能一体阀  
Multifunctional integrated valve

公称通径: DN15~100mm

公称压力: PN1.6Mpa

适用介质: 水

适用温度:  $\leq 80^{\circ}\text{C}$

Nominal Diameter: DN15~100mm

Nominal Pressure: PN1.6MPa

Mediums: Water

Temperature Range:  $\leq 80^{\circ}\text{C}$



KPF 平衡阀  
Balance valve

公称通径: DN40~600mm

公称压力: PN1.0~2.5MPa

适用介质: 水

适用温度:  $\leq 80^{\circ}\text{C}$

Nominal Diameter: DN40~600mm

Nominal Pressure: PN1.0~2.5MPa

Mediums: Water

Temperature Range:  $\leq 80^{\circ}\text{C}$



SP45F、SP15F 数字锁定平衡阀  
Digital lock balance valve

公称通径: DN40~600mm

公称压力: PN1.0~2.5MPa

适用介质: 水

适用温度:  $\leq 80^{\circ}\text{C}$

Nominal Diameter: DN40~600mm

Nominal Pressure: PN1.0~2.5MPa

Mediums: Water

Temperature Range:  $\leq 80^{\circ}\text{C}$



ZYC 自力式压差控制阀  
Self operated differential pressure control valve

公称通径: DN40~600mm

公称压力: PN1.0~2.5MPa

适用介质: 水、油等

适用温度:  $\leq 80^{\circ}\text{C}$

Nominal Diameter: DN40~600mm

Nominal Pressure: PN1.0~2.5MPa

Mediums: Water, oil etc.

Temperature Range:  $\leq 80^{\circ}\text{C}$



ZLF 自力式平衡阀  
Self operated balancing valve

公称通径: DN40~600mm

公称压力: PN1.0~2.5MPa

适用介质: 水、油等

适用温度:  $\leq 80^{\circ}\text{C}$

Nominal Diameter: DN40~600mm

Nominal Pressure: PN1.0~2.5MPa

Mediums: Water, oil etc

Temperature Range:  $\leq 80^{\circ}\text{C}$



ZL47F 自力式流量平衡阀  
Self operated flow balancing valve

公称通径: DN40~600mm

公称压力: PN1.0~2.5MPa

适用介质: 水、油等


适用温度:  $\leq 80^{\circ}\text{C}$

Nominal Diameter: DN40~600mm

Nominal Pressure: PN1.0~2.5MPa

Mediums: Water, oil etc

Temperature Range:  $\leq 80^{\circ}\text{C}$

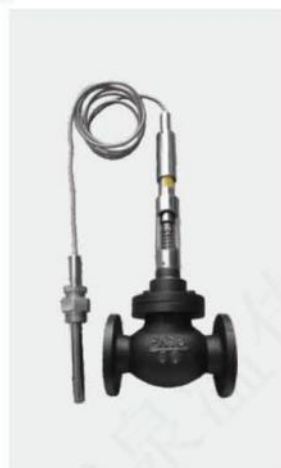

ZZWP 自力式温度调节阀  
Self operated temperature control valve

公称通径: DN20~200mm

公称压力: PN1.6~6.4MPa

适用介质: 水

适用温度:  $\leq 80^{\circ}\text{C}$

Nominal Diameter: DN20~200mm

Nominal Pressure: PN1.6~6.4MPa

Mediums: Water

Temperature Range:  $\leq 80^{\circ}\text{C}$

## ► 铜阀门系列 Copper valve series



**Z15W黄铜水表闸阀**  
Brass water meter gate valve

公称通径: DN15~50mm

公称压力: PN1.6Mpa

适用介质: 水

适用温度:  $\leq 80^{\circ}\text{C}$

Operating range: DN15~50mm

Nominal Pressure: PN1.6MPa

Mediums: Water

Protection grade:  $\leq 80^{\circ}\text{C}$



**Z15W铜丝口闸阀**  
Copper wire gate valve

公称通径: DN15~50mm

公称压力: PN1.6Mpa

适用介质: 水

适用温度:  $\leq 80^{\circ}\text{C}$

Operating range: DN15~50mm

Nominal Pressure: PN1.6MPa

Mediums: Water

Protection grade:  $\leq 80^{\circ}\text{C}$



**机械锁闭闸阀**  
Mechanical locking gate valve

公称通径: DN15~50mm

公称压力: PN1.6Mpa

适用介质: 水

适用温度:  $\leq 80^{\circ}\text{C}$

Operating range: DN15~50mm

Nominal Pressure: PN1.6MPa

Mediums: Water

Protection grade:  $\leq 80^{\circ}\text{C}$



**磁性锁闭闸阀**  
Magnetic lock gate valve

公称通径: DN15~50mm

公称压力: PN1.6Mpa

适用介质: 水

适用温度:  $\leq 80^{\circ}\text{C}$

Operating range: DN15~50mm

Nominal Pressure: PN1.6MPa

Mediums: Water

Protection grade:  $\leq 80^{\circ}\text{C}$



**J11W铜丝扣截止阀**  
Copper thread stop valve

公称通径: DN15~100mm

公称压力: PN1.6MPa

适用介质: 水

适用温度:  $\leq 80^{\circ}\text{C}$

Nominal Diameter: DN15~100mm

Nominal Pressure: PN1.6MPa

Mediums: Water

Temperature Range:  $\leq 80^{\circ}\text{C}$



**铜暖气截止阀**  
Copper heating stop valve

公称通径: DN15~100mm

公称压力: PN1.6Mpa

适用介质: 水

适用温度:  $\leq 80^{\circ}\text{C}$

Nominal Diameter: DN15~100mm

Nominal Pressure: PN1.6MPa

Mediums: Water

Temperature Range:  $\leq 80^{\circ}\text{C}$

## ► 铜阀门系列 Copper valve series



**H11W铜立式止回阀**  
Copper vertical check valve

公称通径: DN15~50mm

公称压力: PN1.6Mpa

适用介质: 水

适用温度:  $\leq 80^{\circ}\text{C}$

Nominal Diameter: DN15~50mm

Nominal Pressure: PN1.6MPa

Mediums: Water

Temperature Range:  $\leq 80^{\circ}\text{C}$



**H14W铜丝口止回阀**  
Copper wire port check valve

公称通径: DN15~100mm

公称压力: PN1.6Mpa

适用介质: 水

适用温度:  $\leq 80^{\circ}\text{C}$

Nominal Diameter: DN15~100mm

Nominal Pressure: PN1.6MPa

Mediums: Water

Temperature Range:  $\leq 80^{\circ}\text{C}$



**铜表前止回阀**  
Copper meter front check valve

公称通径: DN15~25mm

公称压力: PN1.6Mpa

适用介质: 水

适用温度:  $\leq 80^{\circ}\text{C}$

Nominal Diameter: DN15~25mm

Nominal Pressure: PN1.6MPa

Mediums: Water

Temperature Range:  $\leq 80^{\circ}\text{C}$



**Q11F铜丝口球阀**  
Copper wire port ball valve

公称通径: DN10~100mm

公称压力: PN1.6Mpa

适用介质: 水

适用温度:  $\leq 80^{\circ}\text{C}$

Nominal Diameter: DN10~100mm

Nominal Pressure: PN1.6MPa

Mediums: Water

Temperature Range:  $\leq 80^{\circ}\text{C}$



**Q11F黄铜磁性带锁球阀**  
Brass magnetic lock ball valve

公称通径: DN10~100mm

公称压力: PN1.6Mpa

适用介质: 水

适用温度:  $\leq 80^{\circ}\text{C}$

Nominal Diameter: DN10~100mm

Nominal Pressure: PN1.6MPa

Mediums: Water

Temperature Range:  $\leq 80^{\circ}\text{C}$



**锁闭式球阀**  
Locking ball valve

公称通径: DN15~25mm

公称压力: PN1.6Mpa

适用介质: 水

适用温度:  $\leq 80^{\circ}\text{C}$

Nominal Diameter: DN15~25mm

Nominal Pressure: PN1.6MPa

Mediums: Water

Temperature Range:  $\leq 80^{\circ}\text{C}$

## ► 铜阀门系列 Copper valve series



铜过滤器球阀  
Copper filter ball valve

公称通径: DN15~50mm

公称压力: PN1.6Mpa

适用介质: 水

适用温度:  $\leq 80^{\circ}\text{C}$

Nominal Diameter: DN15~50mm

Nominal Pressure: PN1.6MPa

Mediums: Water

Temperature Range:  $\leq 80^{\circ}\text{C}$



铜磁性锁闭测温过滤球阀  
Copper magnetic locking temperature measurement filter ball valve

公称通径: DN20~32mm

公称压力: PN1.6Mpa

适用介质: 水

适用温度:  $\leq 80^{\circ}\text{C}$

Nominal Diameter: DN20~32mm

Nominal Pressure: PN1.6MPa

Mediums: Water

Temperature Range:  $\leq 80^{\circ}\text{C}$



磁性测温球阀  
Magnetic temperature measuring ball valve

公称通径: DN15~50mm

公称压力: PN1.6Mpa

适用介质: 水

适用温度:  $\leq 80^{\circ}\text{C}$

Nominal Diameter: DN15~50mm

Nominal Pressure: PN1.6MPa

Mediums: Water

Temperature Range:  $\leq 80^{\circ}\text{C}$



YZ11铜支管丝口减压阀  
Copper branch pipe screw port pressure reducing valve

公称通径: DN15~80mm

公称压力: PN1.6Mpa

适用介质: 水

适用温度:  $\leq 80^{\circ}\text{C}$

Nominal Diameter: DN15~80mm

Nominal Pressure: PN1.6MPa

Mediums: Water

Temperature Range:  $\leq 80^{\circ}\text{C}$



P21X黄铜自动排气阀  
Brass automatic exhaust valve

公称通径: DN15~25mm

公称压力: PN1.6Mpa

适用介质: 水

适用温度:  $\leq 80^{\circ}\text{C}$

Nominal Diameter: DN15~25mm

Nominal Pressure: PN1.6MPa

Mediums: Water

Temperature Range:  $\leq 80^{\circ}\text{C}$



铜真空破坏器  
Copper vacuum breaker

公称通径: DN15~50mm

公称压力: PN1.6Mpa

适用介质: 水

适用温度:  $\leq 80^{\circ}\text{C}$

Nominal Diameter: DN15~50mm

Nominal Pressure: PN1.6MPa

Mediums: Water

Temperature Range:  $\leq 80^{\circ}\text{C}$

## ► 铜阀门系列 Copper valve series



**GL11W铜丝口Y型过滤器**  
Y-type filter with copper wire mouth

公称通径: DN15~100mm

公称压力: PN1.6Mpa

适用介质: 水

适用温度:  $\leq 80^{\circ}\text{C}$

Nominal Diameter: DN15~100mm

Nominal Pressure: PN1.6Mpa

Mediums: Water

Temperature Range:  $\leq 80^{\circ}\text{C}$



**不锈钢浮球阀**  
Stainless steel ball valve

公称通径: DN15~50mm

公称压力: PN1.6Mpa

适用介质: 水

适用温度:  $\leq 80^{\circ}\text{C}$

Nominal Diameter: DN15~50mm

Nominal Pressure: PN1.6Mpa

Mediums: Water

Temperature Range:  $\leq 80^{\circ}\text{C}$



**HS11X防污隔断阀**  
Antifouling block valve

公称通径: DN15~50mm

公称压力: PN1.6Mpa

适用介质: 水

适用温度:  $\leq 80^{\circ}\text{C}$

Nominal Diameter: DN15~50mm

Nominal Pressure: PN1.6Mpa

Mediums: Water

Temperature Range:  $\leq 80^{\circ}\text{C}$



**Z41W铜法兰闸阀**  
Copper flange globe valve

公称通径: DN50~300mm

公称压力: PN1.6Mpa

适用介质: 水

适用温度:  $\leq 80^{\circ}\text{C}$

Nominal Diameter: DN50~300mm

Nominal Pressure: PN1.6Mpa

Mediums: Water

Temperature Range:  $\leq 80^{\circ}\text{C}$



**J41W铜法兰截止阀**  
Copper flange globe valve

公称通径: DN50~300mm

公称压力: PN1.6Mpa

适用介质: 水

适用温度:  $\leq 80^{\circ}\text{C}$

Nominal Diameter: DN50~300mm

Nominal Pressure: PN1.6Mpa

Mediums: Water

Temperature Range:  $\leq 80^{\circ}\text{C}$



**Q41F铜法兰球阀**  
Copper flange ball valve

公称通径: DN50~300mm

公称压力: PN1.6Mpa

适用介质: 水

适用温度:  $\leq 80^{\circ}\text{C}$

Nominal Diameter: DN50~300mm

Nominal Pressure: PN1.6Mpa

Mediums: Water

Temperature Range:  $\leq 80^{\circ}\text{C}$

## ► 铜阀门、丝扣阀门系列 Copper valve, screw valve series



**GL41W铜法兰过滤器**  
Copper flange filter

公称通径: DN15~200mm

公称压力: PN1.6Mpa

适用介质: 水

适用温度:  $\leq 80^{\circ}\text{C}$

Nominal Diameter: DN15~200mm

Nominal Pressure: PN1.6Mpa

Mediums: Water

Temperature Range:  $\leq 80^{\circ}\text{C}$



**H44W铜法兰止回阀**  
Copper flange check valve

公称通径: DN15~100mm

公称压力: PN1.6Mpa

适用介质: 水

适用温度:  $\leq 80^{\circ}\text{C}$

Nominal Diameter: DN15~100mm

Nominal Pressure: PN1.6Mpa

Mediums: Water

Temperature Range:  $\leq 80^{\circ}\text{C}$



**H41X铜消声止回阀**  
Copper silencing check valve

公称通径: DN40~500mm

公称压力: PN1.6Mpa

适用介质: 水

适用温度:  $\leq 80^{\circ}\text{C}$

Nominal Diameter: DN40~500mm

Nominal Pressure: PN1.6Mpa

Mediums: Water

Temperature Range:  $\leq 80^{\circ}\text{C}$



**PPR球阀**  
PPR ball valve

公称通径: DN15~50mm

公称压力: PN1.6Mpa

适用介质: 水

适用温度:  $\leq 80^{\circ}\text{C}$

Nominal Diameter: DN15~50mm

Nominal Pressure: PN1.6MPa

Mediums: Water

Temperature Range:  $\leq 80^{\circ}\text{C}$



**Z15W不锈钢丝口闸阀**  
Stainless steel wire mouth gate valve

公称通径: DN15~100mm

公称压力: PN1.0~2.5MPa

适用介质: 水

适用温度:  $\leq 150^{\circ}\text{C}$

Nominal Diameter: DN15~100mm

Nominal Pressure: PN1.6Mpa

Mediums: Water

Temperature Range:  $\leq 150^{\circ}\text{C}$



**J11W不锈钢丝口截止阀**  
Stainless steel wire port globe valve

公称通径: DN15~100mm

公称压力: PN1.0~2.5MPa

适用介质: 水

适用温度:  $\leq 150^{\circ}\text{C}$

Nominal Diameter: DN15~100mm

Nominal Pressure: PN1.6Mpa

Mediums: Water

Temperature Range:  $\leq 150^{\circ}\text{C}$

## ► 丝扣阀门系列 Screw valve series



**J11W内螺纹截止阀**  
Internal thread stop valve

公称通径: DN15~80mm  
公称压力: PN1.0~2.5MPa  
适用介质: 水  
适用温度:  $\leq 150^{\circ}\text{C}$

Nominal Diameter: DN15~80mm  
Nominal Pressure: PN1.0~2.5MPa  
Mediums: Water  
Temperature Range:  $\leq 150^{\circ}\text{C}$



**Q11F一片式内螺纹球阀**  
One piece female thread ball valve

公称通径: DN15~50mm  
公称压力: PN1.0~2.5MPa  
适用介质: 水  
适用温度:  $\leq 150^{\circ}\text{C}$

Nominal Diameter: DN15~50mm  
Nominal Pressure: PN1.0~2.5MPa  
Mediums: Water  
Temperature Range:  $\leq 150^{\circ}\text{C}$



**Q11F二片式内螺纹球阀**  
Two piece internal thread ball valve

公称通径: DN15~50mm  
公称压力: PN1.0~2.5MPa  
适用介质: 水  
适用温度:  $\leq 150^{\circ}\text{C}$

Nominal Diameter: DN15~50mm  
Nominal Pressure: PN1.0~2.5MPa  
Mediums: Water  
Temperature Range:  $\leq 150^{\circ}\text{C}$



**Q11F三片式内螺纹球阀**  
Three piece internal thread ball valve

公称通径: DN15~50mm  
公称压力: PN1.0~2.5MPa  
适用介质: 水  
适用温度:  $\leq 150^{\circ}\text{C}$

Nominal Diameter: DN15~50mm  
Nominal Pressure: PN1.0~2.5MPa  
Mediums: Water  
Temperature Range:  $\leq 150^{\circ}\text{C}$



**GL11W 内螺纹过滤器**  
Internal thread filter

公称通径: DN15~100mm  
公称压力: PN1.0~2.5MPa  
适用介质: 水  
适用温度:  $\leq 150^{\circ}\text{C}$

Nominal Diameter: DN15~100mm  
Nominal Pressure: PN1.0~2.5MPa  
Mediums: Water  
Temperature Range:  $\leq 150^{\circ}\text{C}$



**H14W 内螺纹旋启式止回阀**  
Internal thread swing check valve

公称通径: DN15~100mm  
公称压力: PN1.0~2.5MPa  
适用介质: 水  
适用温度:  $\leq 150^{\circ}\text{C}$

Nominal Diameter: DN15~100mm  
Nominal Pressure: PN1.0~2.5MPa  
Mediums: Water  
Temperature Range:  $\leq 150^{\circ}\text{C}$



# TS

**ZHEJIANG TIANSHENG VALVE CO.,LTD**

**WENZHOU TIANSHENG INDUSTRY CO.,LTD**

Email: [admin@tsv.cn](mailto:admin@tsv.cn)

Mobile: +86-577-6796 9770

Whatsapp: +86-13695850057

Address: TianSheng Industrial Park, Dong'ou Industrial Zone, Oubei Town, Wenzhou City, Zhejiang Province, China

